

Work through this list before submitting. It is the difference between one proof round and three.

☐	File format	Print-ready PDF. Vector artwork wherever possible. Raster images at a minimum of 300 DPI at final size.
☐	Colour	CMYK only. No RGB, no spot colours, no Pantone unless agreed with us in writing beforehand.
☐	Fonts	Convert all fonts to outlines. We cannot substitute a missing font — we will stop and ask.
☐	Minimum type size	6 pt for positive text. 8 pt for reversed (white-out) text. Below this, legibility is not guaranteed.
☐	Minimum line weight	0.5 pt for positive lines. 0.75 pt for reversed lines.
☐	Bleed	3 mm beyond the cut line on every edge. Extend background colours and images fully into the bleed.
☐	Safe area	Keep all critical elements — logo, legal text, barcodes — at least 5 mm inside the cut line.
☐	Barcodes	Minimum 80% magnification. Place on a light background. Do not rotate. Leave a 3 mm quiet zone.
☐	QR codes	Minimum 20 x 20 mm. High contrast. Test the printed proof with a phone before approving.
☐	Degassing valve	Keep the valve zone free of critical artwork. See the valve position marked on each dieline.
☐	Seal areas	Keep dense ink coverage out of the seal zones. Heavy ink in a seal area can compromise the seal.
☐	Layers	Flatten transparency. Remove hidden layers, guides and non-printing elements before export.

What happens next

- 1

You send artwork
Upload on the product page, or email info@vklnd.com.
- 2


We check it
Against this checklist. Usually within one business day.
- 3

You get a proof
A digital proof for approval. One round is included.
- 4

Production
12-16 days after you approve the proof.
- 5


Delivery
DAP, free, anywhere in the EU.


Not sure? Ask before you send.
We would rather answer a question than reprint a run.

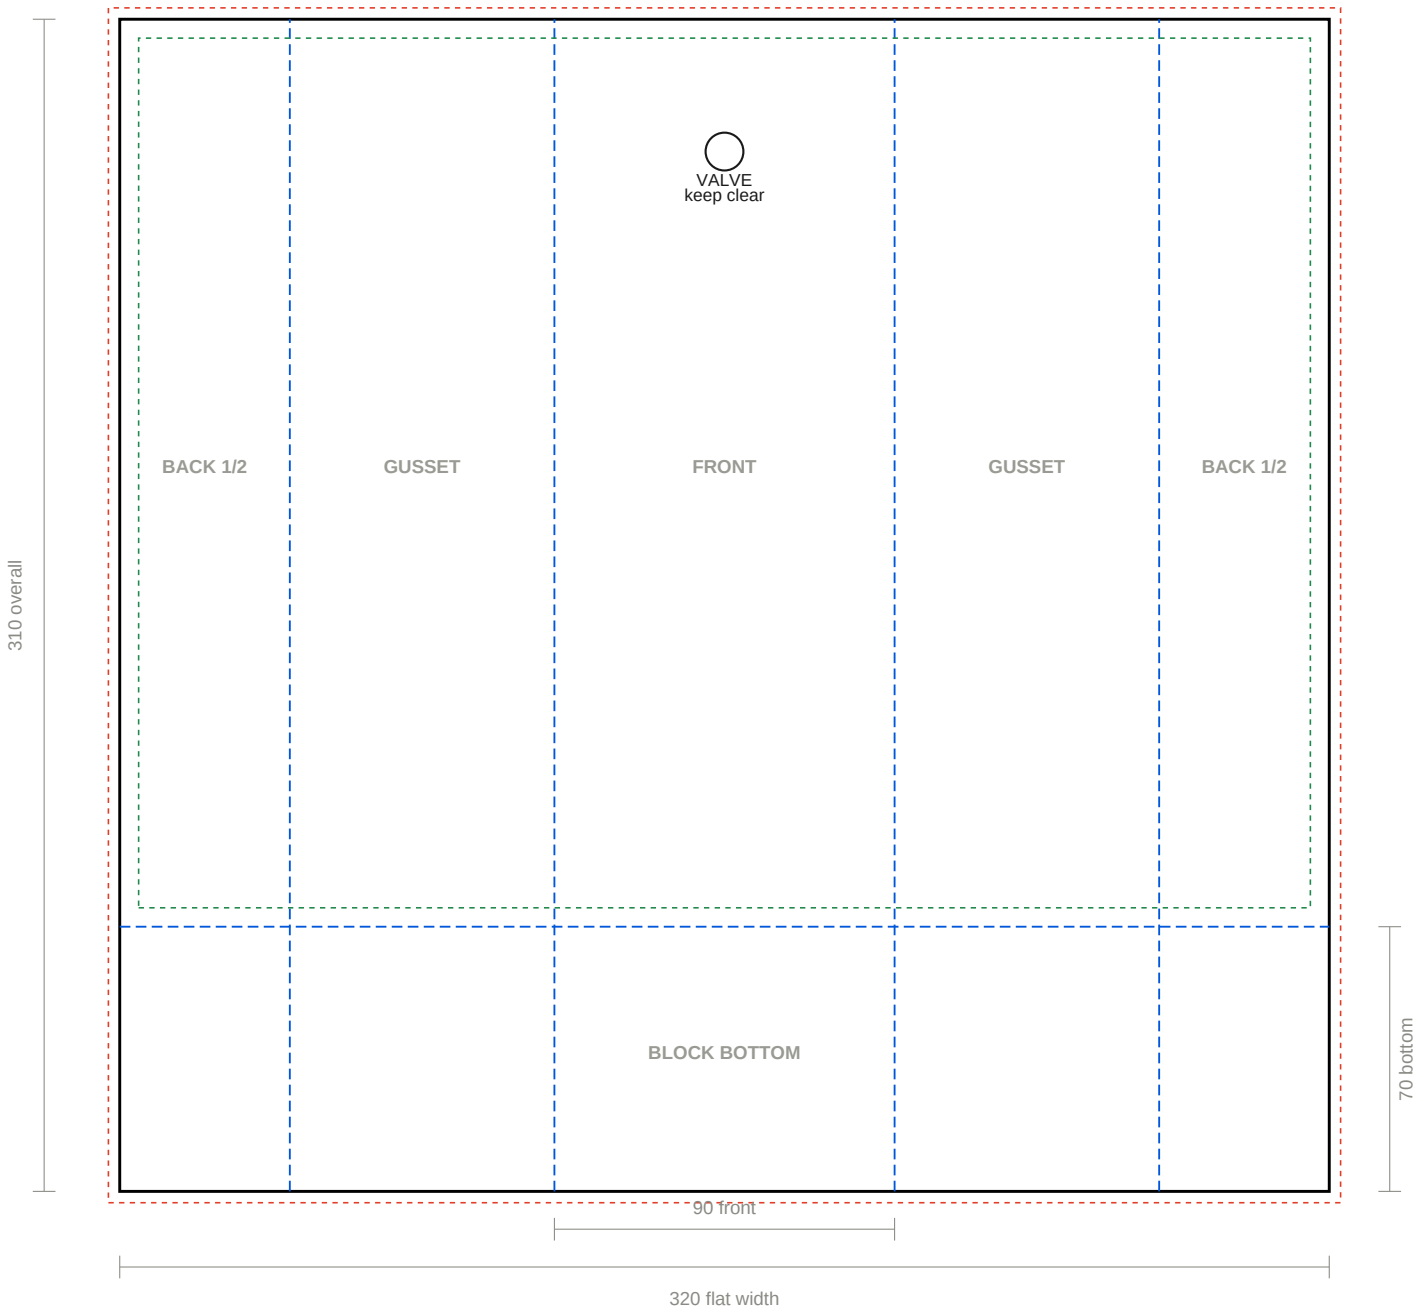

- Cut line
- - - Fold / crease
- - - Bleed (3 mm outside cut)
- - - Safe area (5 mm inside cut)

Custom Coffee Bag — 250 g
Body 90 x 240 mm · Gusset 70 mm · Block bottom · Tolerance +/- 5 mm
Digital CMYK, full outside coverage, matte finish · One-way degassing valve as standard
Compostable · Recyclable · Standard barrier film

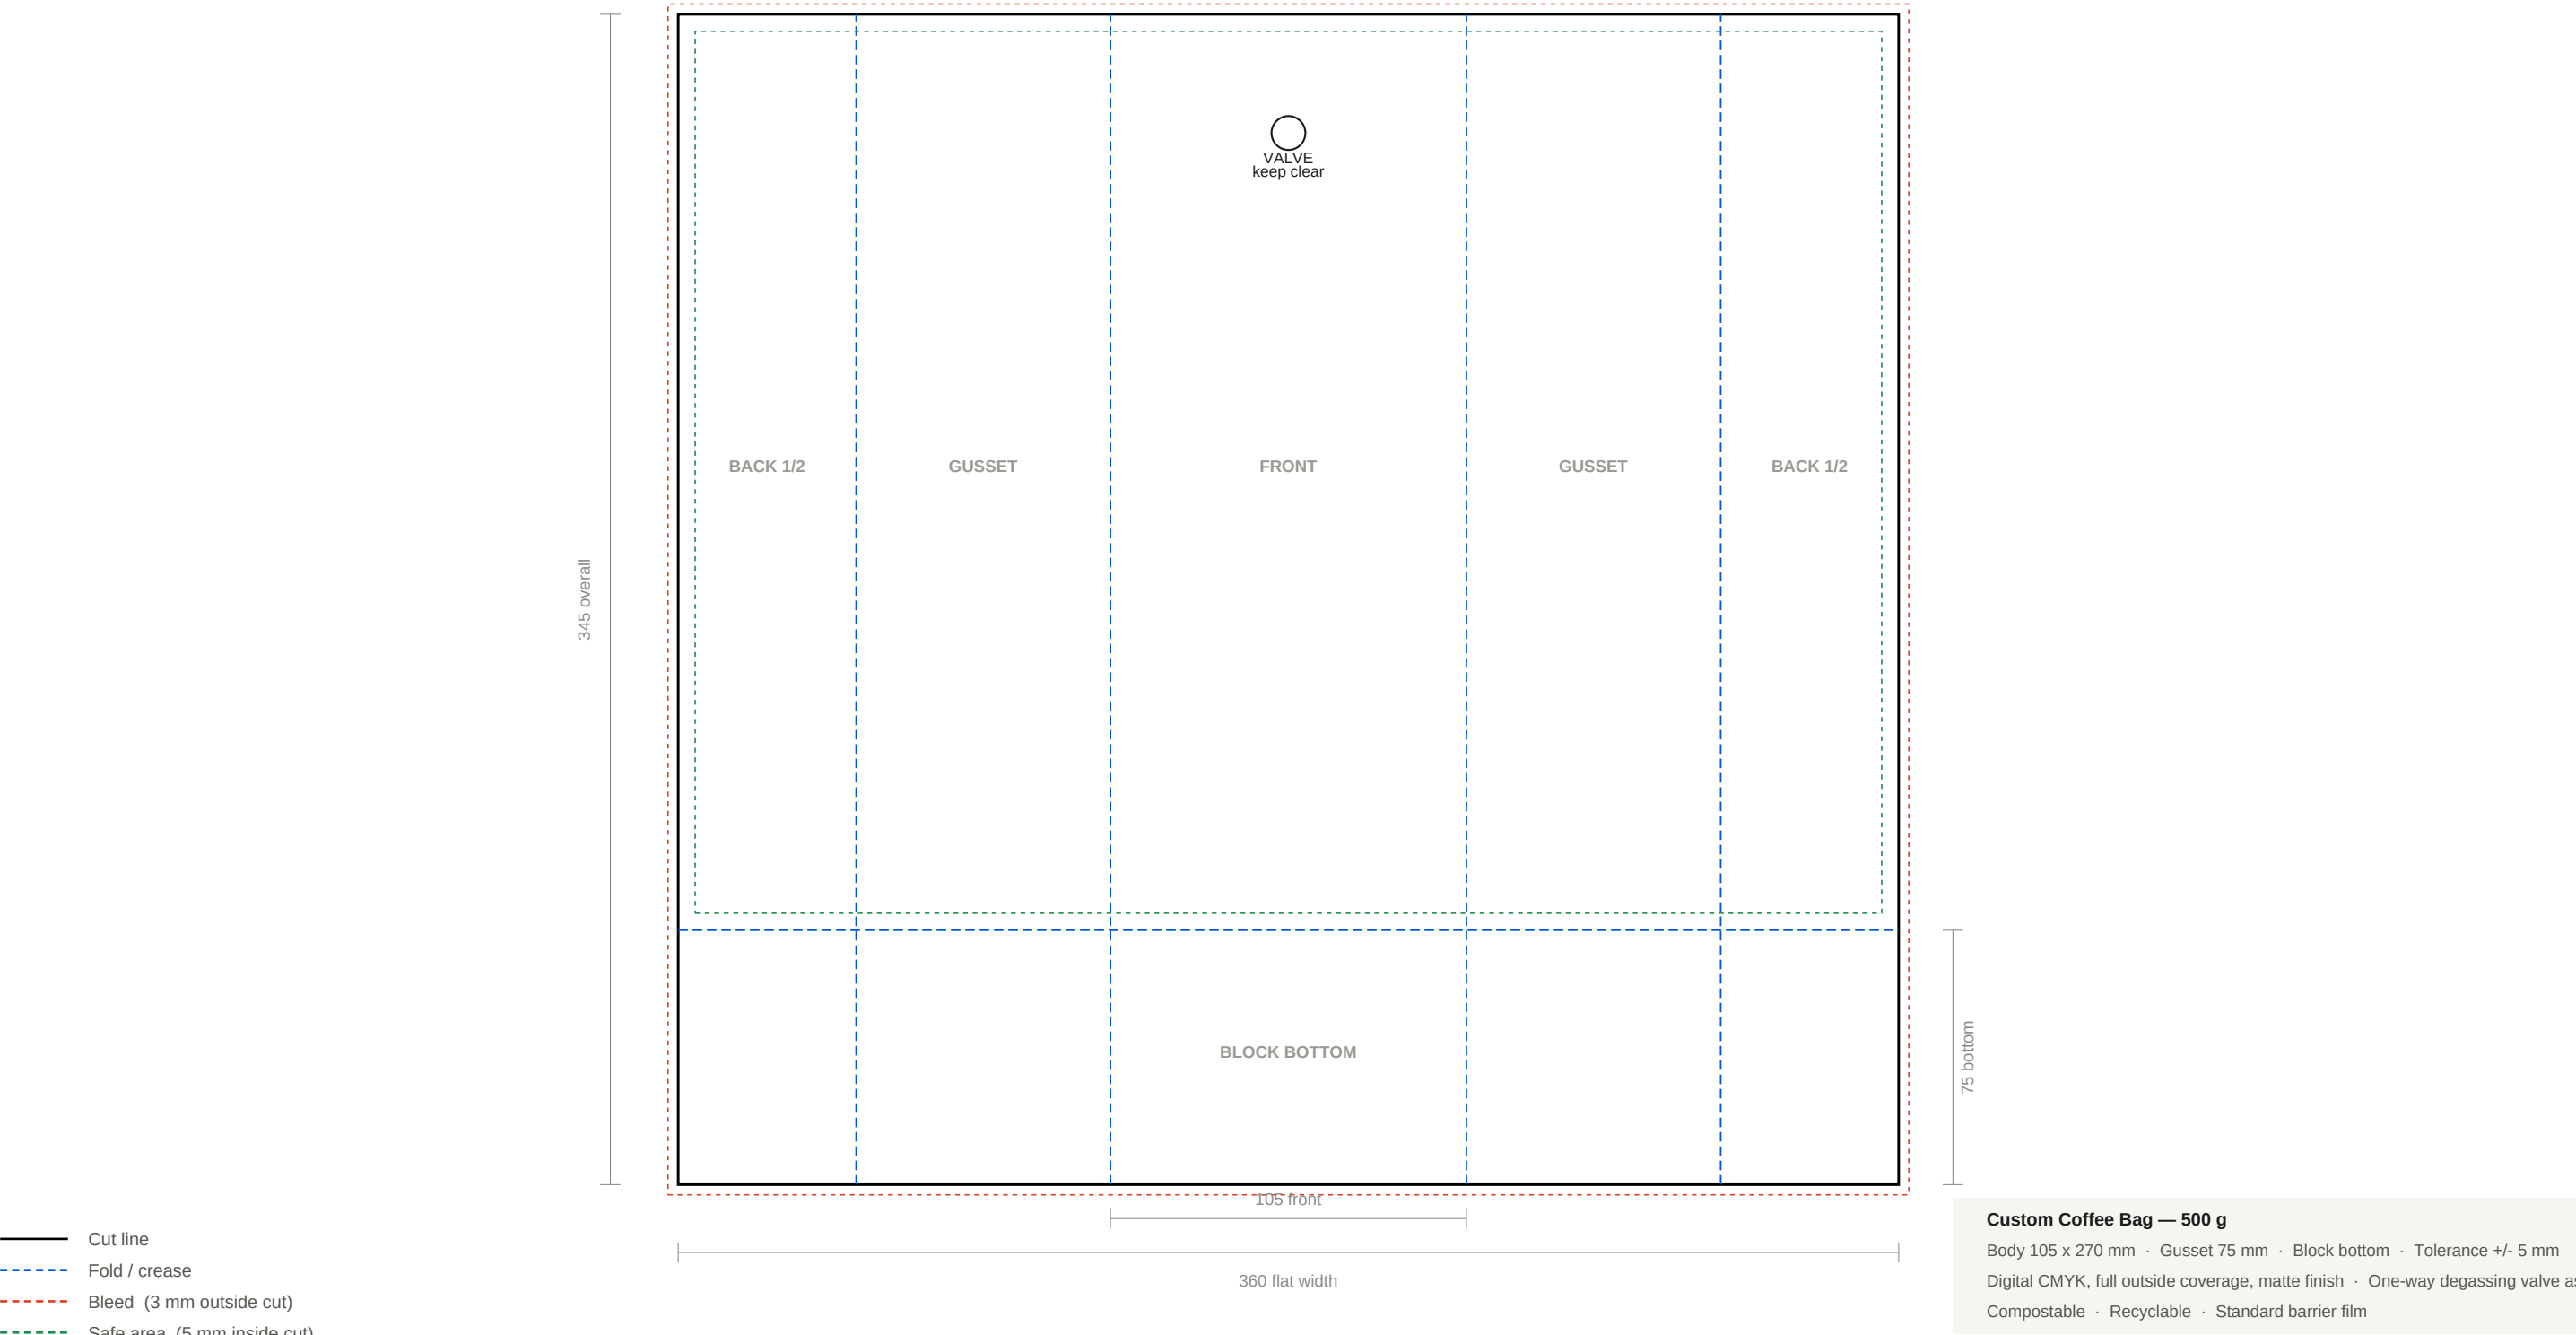

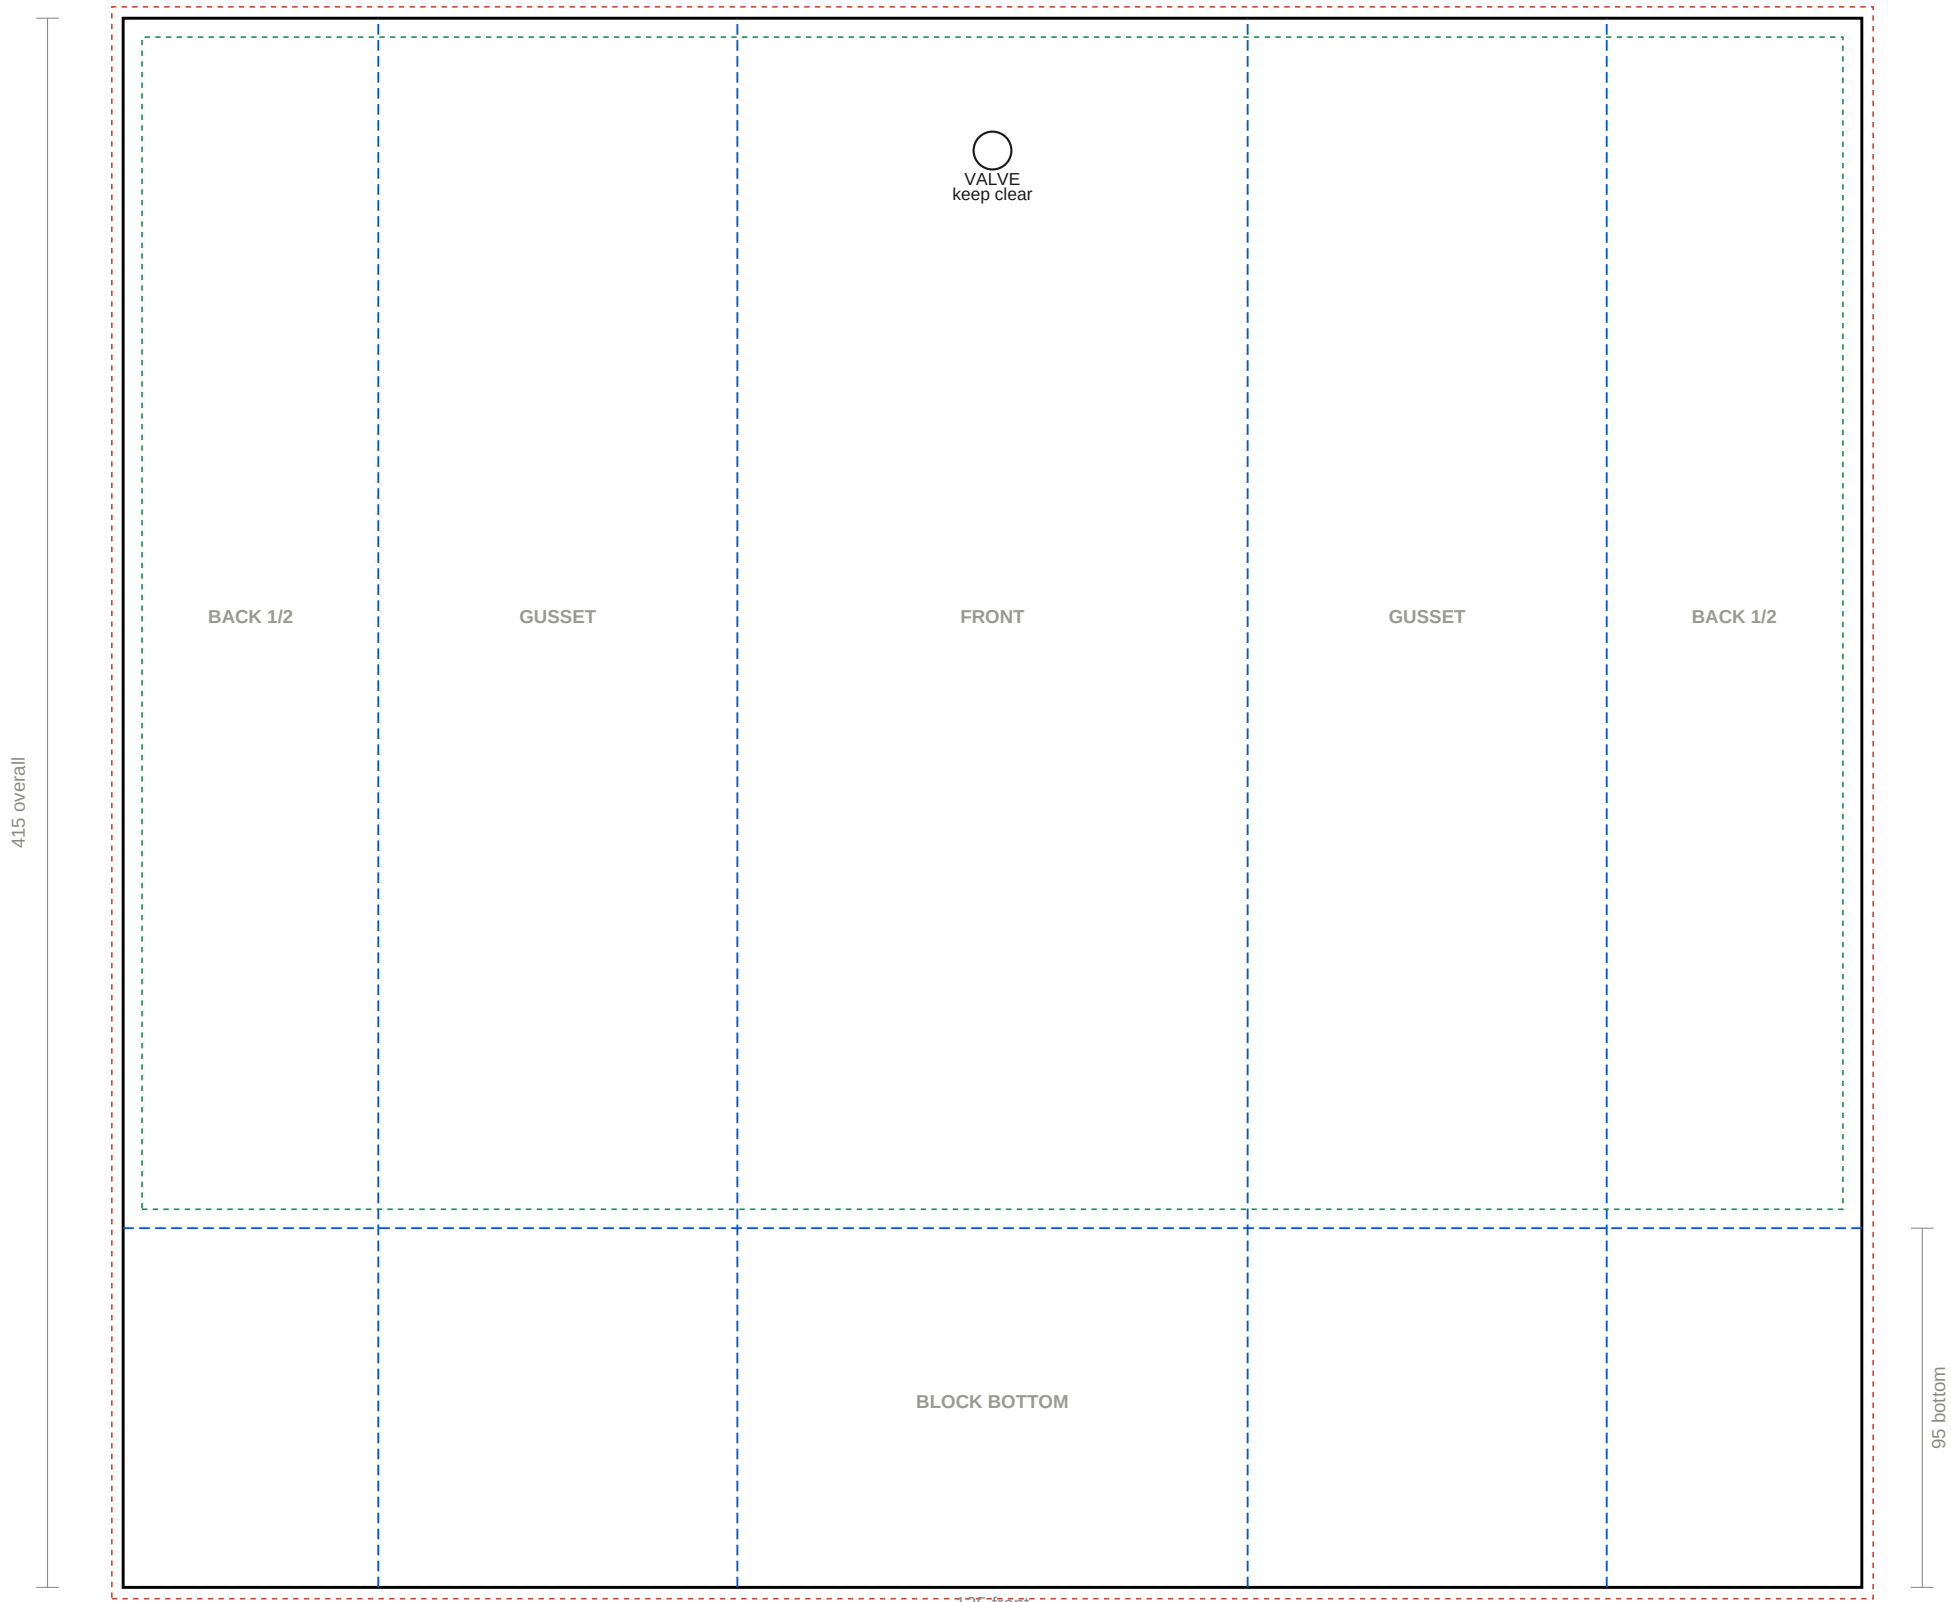

- Cut line
- - - Fold / crease
- - - Bleed (3 mm outside cut)
- - - Safe area (5 mm inside cut)

Custom Coffee Bag — 1 kg
Body 135 x 320 mm · Gusset 95 mm · Block bottom · Tolerance +/- 5 mm
Digital CMYK, full outside coverage, matte finish · One-way degassing valve as standard
Compostable · Recyclable · Standard barrier film